



FAG

QJ306-XL-MPA-C3



Four-point contact bearing

Schaeffler ID:
0167424430030

Four point contact bearing QJ3..-XL-MPA,
X-life, solid brass cage

X-life

Technical information

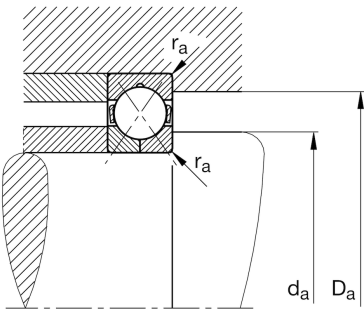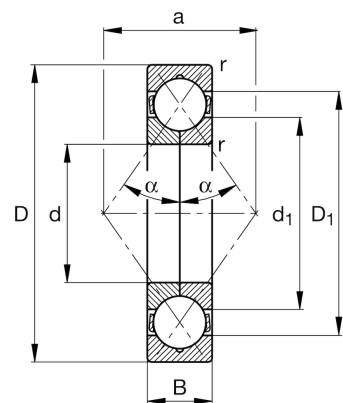

Main Dimensions & Performance Data

d	30 mm	Bore diameter
D	72 mm	Outside diameter
B	19 mm	Width
C _r	57.000 N	Basic dynamic load rating, radial
C _{0r}	38.500 N	Basic static load rating, radial
C _{ur}	2.700 N	Fatigue load limit, radial
n _G	19.600 1/min	Limiting speed
n _{gr}	7.800 1/min	Reference speed
	403 g	Weight

Mounting dimensions

d _{a min}	37 mm	Minimum diameter shaft shoulder
D _{a max}	65 mm	Maximum diameter of housing shoulder
r _{a max}	1 mm	Maximum fillet radius

Dimensions

r _{min}	1,1 mm	Minimum chamfer dimension
D ₁	58 mm	Shoulder diameter outer ring
d ₁	44 mm	Shoulder diameter inner ring
a	36 mm	Distance between the apexes of the pressure cones
α	35 °	Contact angle

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	150 °C	Operating temperature max.