


Types V-Grooved Pulleys:

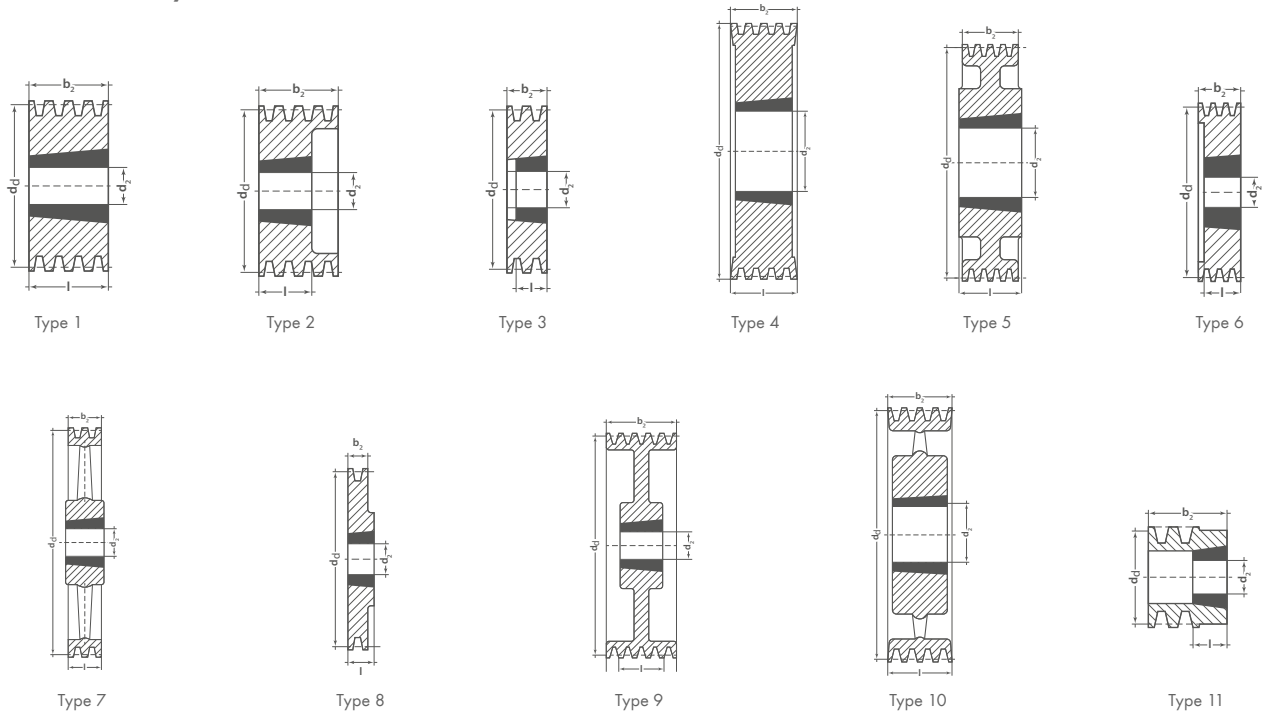

We reserve the right to make technical changes.

Balancing:

The list prices apply, to cast iron pulleys balanced in one plane as follows: Grade G 6,3 for $\varnothing d_d \leq 400$ mm at $n = 1500$ rpm, for $\varnothing d_d > 400$ mm at $v = 30$ m/sec.

Balancing is carried out minus the key on a smooth mandrel. Machines where the rotors are balanced with an adjusting spring inserted in the shaft end must be ordered as follows: "Balanced with finished bore without key on a smooth mandrel without inserted spring".

We recommend balancing in two planes grade G 16 or better if $v \geq 30$ m/sec. or if the ratio between datum diameter and pulley face width $d_d : b_2 < 4$ at $v > 20$ m/sec. Surcharges for balancing on request. Please give pulley operating speed.

| Surcharges for finished bore H7 and keyway to DIN 6885 part 1 | | | | | | | |
|---|---------------------------------|------------------------------|---------------------------------|------------------------------|---------------------------------|------------------------------|-----------------------------------|
| Quantity | Finished bore up to 30 mm | | Finished bore 31 mm to 50 mm | | Finished bore 51 mm to 75 mm | | Drilled and tapped for set screws |
| | price per item € without keyway | price per item € with keyway | price per item € without keyway | price per item € with keyway | price per item € without keyway | price per item € with keyway | price per item € |
| 1 to 2 | | | | | | | |
| 3 to 5 | | | | | | | |
| 6 to 10 | | | | | | | |
| 11 to 24 | | | | | | | |
| 25 to 50 | | | | | | | |
| over 50 | | | | | | | |

Special pulleys and custom designed pulleys on request.

optibelt KS V-Grooved Pulleys for Taper Bushings
Profile SPB



| Datum diameter d_d (mm) | No. of grooves | Type | Type No. | Weight without bushing (≈kg) | Taper bushing | Datum diameter d_d (mm) | No. of grooves | Type | Type No. | Weight without bushing (≈kg) | Taper bushing |
|------------------------------|----------------|------|----------|---------------------------------|---------------|------------------------------|----------------|------|----------|---------------------------------|---------------|
| TB SPB/17 | | | | | | 180 | 1 | ○ | 9 | 4.1 | 1610 |
| 100 | 1 | ● | 8 | 0.9 | 1610 | | 2 | ● | 8 | 4.5 | 2517 |
| | 2 | ● | 6 | 1.2 | 1610 | | 3 | ● | 2 | 5.5 | 2517 |
| | 3 | ● | 6 | 1.7 | 1610 | | 4 | ● | 4 | 6.9 | 2517 |
| 106 | 1 | ● | 8 | 1.0 | 1610 | | 5 | ● | 4 | 7.1 | 3020 |
| | 2 | ● | 6 | 1.35 | 1610 | | 6 | ● | 4 | 7.7 | 3020 |
| | 3 | ● | 6 | 1.85 | 1610 | | 8 | ● | 4 | 9.5 | 3030 |
| 112 | 1 | ● | 8 | 1.1 | 1610 | | 190 | 1 | ○ | 5 | 4.6 |
| | 2 | ● | 6 | 1.5 | 1610 | 2 | | ● | 8 | 5.0 | 2517 |
| | 3 | ● | 6 | 2.0 | 1610 | 3 | | ● | 2 | 6.3 | 2517 |
| 118 | 1 | ● | 8 | 1.3 | 1610 | 4 | | ● | 4 | 7.6 | 2517 |
| | 2 | ● | 2 | 1.7 | 1610 | 5 | | ● | 4 | 8.1 | 3020 |
| | 3 | ● | 2 | 2.3 | 1610 | 6 | | ● | 4 | 9.2 | 3020 |
| 125 | 1 | ● | 8 | 1.5 | 1610 | 8 | | ● | 4 | 11.2 | 3030 |
| | 2 | ● | 2 | 1.9 | 2012 | 200 | | 1 | x | 7 | 5.0 |
| | 3 | ● | 2 | 2.4 | 2012 | | 2 | ● | 8 | 5.4 | 2517 |
| | 4 | ● | 4 | 3.0 | 2012 | | 3 | ● | 2 | 6.5 | 2517 |
| | 5 | ● | 6 | 3.5 | 2012 | | 4 | ● | 4 | 8.8 | 3020 |
| 132 | 1 | ● | 8 | 1.8 | 1610 | | 5 | ● | 4 | 9.1 | 3020 |
| | 2 | ● | 2 | 2.2 | 2012 | | 6 | ● | 4 | 10.3 | 3020 |
| | 3 | ● | 2 | 2.8 | 2012 | | 8 | ● | 4 | 13.5 | 3535 |
| | 4 | ● | 4 | 3.4 | 2012 | | 212 | 1 | x | 7 | 4.2 |
| | 5 | ● | 6 | 3.7 | 2517 | 2 | | ○ | 5 | 4.9 | 2517 |
| 140 | 1 | ● | 8 | 2.3 | 1610 | 3 | | ○ | 9 | 6.0 | 2517 |
| | 2 | ● | 2 | 2.7 | 2012 | 4 | | ● | 4 | 9.8 | 3020 |
| | 3 | ● | 2 | 3.3 | 2012 | 5 | | ● | 4 | 11.0 | 3020 |
| | 4 | ● | 4 | 3.7 | 2517 | 6 | | ● | 4 | 14.3 | 3535 |
| | 5 | ● | 4 | 4.5 | 2517 | 8 | | ● | 4 | 16.6 | 3535 |
| | 6 | ● | 4 | 4.6 | 2517 | 224 | | 1 | x | 7 | 4.7 |
| 150 | 1 | ● | 8 | 2.7 | 1610 | | 2 | x | 7 | 5.3 | 2517 |
| | 2 | ● | 2 | 3.1 | 2012 | | 3 | x | 10 | 6.3 | 2517 |
| | 3 | ● | 2 | 3.9 | 2517 | | 4 | ● | 4 | 11.3 | 3020 |
| | 4 | ● | 4 | 4.4 | 2517 | | 5 | ● | 4 | 12.7 | 3020 |
| | 5 | ● | 4 | 5.2 | 2517 | | 6 | ● | 4 | 17.0 | 3535 |
| | 6 | ● | 4 | 5.6 | 2517 | | 8 | ● | 4 | 19.3 | 3535 |
| 160 | 1 | ● | 8 | 2.8 | 1610 | | 10 | ● | 4 | 21.8 | 3535 |
| | 2 | ● | 2 | 3.9 | 2012 | 236 | 1 | x | 7 | 5.0 | 2012 |
| | 3 | ● | 2 | 4.8 | 2517 | | 2 | x | 7 | 5.5 | 2517 |
| | 4 | ● | 4 | 5.7 | 2517 | | 3 | x | 10 | 7.0 | 2517 |
| | 5 | ● | 4 | 6.6 | 2517 | | 4 | ● | 4 | 14.5 | 3020 |
| | 6 | ● | 4 | 6.5 | 3020 | | 5 | ● | 4 | 16.9 | 3535 |
| | 8 | ● | 4 | 8.0 | 3020 | | 6 | ● | 4 | 20.0 | 3535 |
| 170 | 1 | ● | 8 | 2.9 | 1610 | | 8 | ● | 4 | 22.3 | 3535 |
| | 2 | ● | 2 | 3.3 | 2012 | | 10 | ● | 4 | 25.3 | 3535 |
| | 3 | ● | 2 | 4.9 | 2517 | | | | | | |
| | 4 | ● | 4 | 5.7 | 2517 | | | | | | |
| | 5 | ● | 4 | 6.1 | 3020 | | | | | | |
| | 6 | ● | 4 | 6.5 | 3020 | | | | | | |
| | 8 | ● | 4 | 8.0 | 3030 | | | | | | |



optibelt **KS** V-Grooved Pulleys for Taper Bushings Profile SPB

| Datum diameter d_d (mm) | No. of grooves | Type | Type No. | Weight without bushing (≈kg) | Taper bushing | Datum diameter d_d (mm) | No. of grooves | Type | Type No. | Weight without bushing (≈kg) | Taper bushing | |
|---------------------------|----------------|------|----------|------------------------------|---------------|---------------------------|----------------|------|----------|------------------------------|---------------|------|
| 250 | 1 | x | 7 | 5.4 | 2012 | 375 | 2 | x | 7 | 9.5 | 3020 | |
| | 2 | x | 7 | 5.5 | 2517 | | 3 | x | 10 | 11.5 | 3020 | |
| | 3 | x | 10 | 7.7 | 3020 | | 4 | x | 7 | 16.5 | 3535 | |
| | 4 | x | 10 | 19.6 | 3020 | | 6 | x | 10 | 25.0 | 3535 | |
| | 5 | ● | 4 | 21.7 | 3535 | | 8 | x | 10 | 28.0 | 3535 | |
| | 6 | ● | 4 | 23.3 | 3535 | | 400 | 2 | x | 7 | 10.0 | 3020 |
| | 8 | ● | 4 | 27.5 | 3535 | | | 3 | x | 7 | 18.3 | 3535 |
| | 10 | ● | 4 | 29.3 | 3535 | | | 4 | x | 7 | 20.5 | 3535 |
| 265 | 2 | x | 7 | 6.2 | 2517 | 5 | | x | 10 | 23.4 | 3535 | |
| | 3 | ○ | 9 | 8.0 | 3020 | 6 | | x | 10 | 25.1 | 3535 | |
| | 4 | ○ | 9 | 9.5 | 3020 | 8 | | x | 10 | 36.5 | 4040 | |
| | 6 | ● | 4 | 16.7 | 3535 | 10 | | x | 10 | 41.0 | 4040 | |
| | 8 | ● | 4 | 24.0 | 3535 | 425 | | 2 | x | 7 | 11.5 | 3020 |
| 280 | 1 | x | 7 | 6.1 | 2012 | | 3 | x | 7 | 18.0 | 3535 | |
| | 2 | x | 7 | 6.8 | 2517 | | 4 | x | 7 | 19.5 | 3535 | |
| | 3 | x | 10 | 8.6 | 3020 | | 6 | x | 10 | 25.1 | 3535 | |
| | 4 | x | 10 | 10.1 | 3020 | | 8 | x | 10 | 52.5 | 4040 | |
| | 5 | ○ | 9 | 17.8 | 3535 | | 450 | 2 | x | 7 | 12.1 | 3020 |
| | 6 | ○ | 9 | 19.6 | 3535 | | | 3 | x | 7 | 21.9 | 3535 |
| | 8 | ○ | 9 | 26.7 | 3535 | | | 4 | x | 7 | 24.5 | 3535 |
| | 10 | ○ | 9 | 30.5 | 3535 | 5 | | x | 10 | 27.3 | 3535 | |
| 300 | 2 | x | 7 | 7.3 | 2517 | 6 | | x | 10 | 35.5 | 4040 | |
| | 3 | x | 10 | 9.2 | 3020 | 8 | | x | 10 | 40.9 | 4040 | |
| | 4 | x | 7 | 14.3 | 3535 | 10 | | x | 10 | 53.5 | 4545 | |
| | 5 | x | 10 | 18.2 | 3535 | 500 | | 2 | x | 7 | 13.2 | 3020 |
| | 6 | x | 10 | 21.9 | 3535 | | 3 | x | 7 | 23.1 | 3535 | |
| | 8 | ○ | 9 | 26.2 | 3535 | | 4 | x | 7 | 26.6 | 3535 | |
| 315 | 1* | x | 7 | 7.2 | 2012 | | 5 | x | 10 | 29.9 | 3535 | |
| | 2 | x | 7 | 7.8 | 2517 | | 6 | x | 10 | 38.9 | 4040 | |
| | 3 | x | 10 | 9.6 | 3020 | | 8 | x | 10 | 45.5 | 4040 | |
| | 4 | x | 7 | 17.1 | 3535 | | 10 | x | 10 | 61.0 | 4545 | |
| | 5 | x | 10 | 18.8 | 3535 | | 560 | 2* | x | 7 | 16.5 | 3030 |
| | 6 | x | 10 | 23.0 | 3535 | 3 | | x | 7 | 25.9 | 3535 | |
| | 8 | x | 10 | 26.0 | 3535 | 4 | | x | 7 | 29.0 | 3535 | |
| | 10 | ○ | 9 | 31.5 | 3535 | 5 | | x | 7 | 35.3 | 4040 | |
| 335 | 2 | x | 7 | 7.8 | 2517 | 6 | | x | 10 | 43.1 | 4040 | |
| | 3 | x | 10 | 10.5 | 3020 | 8 | | x | 10 | 49.0 | 4545 | |
| | 4 | x | 7 | 18.3 | 3535 | 10 | | x | 10 | 55.7 | 4545 | |
| | 5 | x | 10 | 19.5 | 3535 | 630 | | 2* | x | 7 | 18.5 | 3030 |
| | 6 | x | 10 | 22.0 | 3535 | | 3 | x | 7 | 28.9 | 3535 | |
| | 8 | x | 10 | 28.2 | 3535 | | 4 | x | 7 | 33.3 | 3535 | |
| | 10 | x | 10 | 36.0 | 4040 | | 5 | x | 7 | 43.1 | 4040 | |
| 355 | 2 | x | 7 | 8.7 | 3020 | | 6 | x | 10 | 49.2 | 4040 | |
| | 3 | x | 10 | 12.1 | 3020 | | 8 | x | 10 | 62.0 | 4545 | |
| | 4 | x | 7 | 18.6 | 3535 | | 10 | x | 10 | 72.0 | 4545 | |
| | 5 | x | 10 | 20.8 | 3535 | | 710 | 3 | x | 7 | 33.2 | 3535 |
| | 6 | x | 10 | 22.8 | 3535 | 4 | | x | 7 | 39.1 | 3535 | |
| | 8 | x | 10 | 32.0 | 3535 | 5 | | x | 7 | 50.2 | 4040 | |
| | 10 | x | 10 | 38.0 | 4040 | 6 | | x | 10 | 62.3 | 4040 | |
| | | | | | | 8 | | x | 10 | 71.0 | 4545 | |
| | | | | | 10 | x | | 10 | 80.0 | 4545 | | |

| Datum diameter d_d (mm) | No. of grooves | Type | Weight (≈kg) | Finished bore hole d_{max} (mm) | Hub length l (mm) | Datum diameter d_d (mm) | No. of grooves | Type | Weight (≈kg) | Finished bore hole d_{max} (mm) | Hub length l (mm) |
|---------------------------|----------------|------|--------------|-----------------------------------|---------------------|---------------------------|----------------|------|--------------|-----------------------------------|---------------------|
| SPB/17 | | | | | | | | | | | |
| 56▲ | 1 | ○ | 0.600 | 20 | 41 | 118▲ | 1 | ○ | 1.600 | 32 | 41 |
| | 2 | ○ | 1.000 | 20 | 60 | | 2 | ○ | 2.400 | 38 | 60 |
| | 3 | ○ | 1.100 | 22 | 62 | | 3 | ○ | 3.200 | 42 | 55 |
| 63▲ | 1 | ○ | 0.800 | 20 | 41 | | 4 | ○ | 5.200 | 42 | 70 |
| | 2 | ○ | 1.200 | 20 | 60 | | 5 | ○ | 7.200 | 42 | 75 |
| | 3 | ○ | 1.200 | 22 | 62 | | 6 | ○ | 6.600 | 42 | 85 |
| 71▲ | 1 | ○ | 0.800 | 22 | 41 | 125▲ | 1 | ○ | 1.700 | 32 | 41 |
| | 2 | ○ | 1.300 | 22 | 60 | | 2 | ○ | 2.600 | 38 | 60 |
| | 3 | ○ | 1.600 | 22 | 55 | | 3 | ○ | 3.300 | 42 | 55 |
| 75▲ | 1 | ○ | 0.800 | 25 | 41 | | 4 | ○ | 4.700 | 42 | 70 |
| | 2 | ○ | 1.400 | 25 | 60 | | 5 | ○ | 8.600 | 42 | 75 |
| | 3 | ○ | 1.900 | 25 | 62 | | 6 | ○ | 8.000 | 48 | 85 |
| 80▲ | 1 | ○ | 1.000 | 28 | 41 | 132▲ | 1 | ○ | 1.900 | 30 | 41 |
| | 2 | ○ | 1.700 | 28 | 60 | | 2 | ○ | 2.600 | 30 | 60 |
| | 3 | ○ | 2.100 | 28 | 55 | | 3 | ○ | 3.500 | 42 | 55 |
| | 4 | ○ | 2.400 | 28 | 70 | | 4 | ○ | 6.300 | 42 | 70 |
| | 5 | ○ | 2.700 | 28 | 80 | | 5 | ○ | 9.400 | 42 | 75 |
| 85▲ | 1 | ○ | 1.100 | 30 | 41 | | 140 | 6 | ○ | 8.500 | 42 |
| | 2 | ○ | 1.700 | 30 | 60 | 1 | | ○ | 2.100 | 32 | 41 |
| | 3 | ○ | 2.200 | 30 | 55 | 2 | | ○ | 2.900 | 38 | 60 |
| | 4 | ○ | 2.700 | 30 | 70 | 3 | | ○ | 3.900 | 42 | 55 |
| | 5 | ○ | 3.000 | 30 | 75 | 4 | | ○ | 6.900 | 42 | 70 |
| 90▲ | 1 | ○ | 1.200 | 32 | 41 | 150 | | 5 | ○ | 7.600 | 48 |
| | 2 | ○ | 1.800 | 38 | 60 | | 6 | ○ | 11.400 | 48 | 85 |
| | 3 | ○ | 2.300 | 38 | 55 | | 1 | ○ | 2.400 | 32 | 43 |
| | 4 | ○ | 3.100 | 38 | 70 | | 2 | ○ | 3.200 | 38 | 48 |
| | 5 | ○ | 3.300 | 38 | 75 | | 3 | ○ | 4.300 | 42 | 60 |
| 95▲ | 1 | ○ | 1.300 | 35 | 41 | | 160 | 4 | ○ | 6.800 | 42 |
| | 2 | ○ | 2.000 | 38 | 60 | 5 | | ○ | 8.400 | 48 | 75 |
| | 3 | ○ | 2.500 | 38 | 67 | 6 | | ○ | 12.100 | 48 | 85 |
| | 4 | ○ | 2.900 | 38 | 70 | 1 | | x | 2.500 | 38 | 43 |
| | 5 | ○ | 3.600 | 38 | 75 | 2 | | x | 3.300 | 42 | 48 |
| 100▲ | 1 | ○ | 1.300 | 32 | 41 | 170 | | 3 | x | 4.600 | 48 |
| | 2 | ○ | 2.100 | 38 | 60 | | 4 | ○ | 7.000 | 48 | 70 |
| | 3 | ○ | 2.900 | 38 | 55 | | 5 | ○ | 9.400 | 48 | 75 |
| | 4 | ○ | 3.800 | 38 | 70 | | 6 | ○ | 12.900 | 55 | 85 |
| | 5 | ○ | 4.500 | 38 | 75 | | 1 | x | 2.900 | 42 | 43 |
| | 6 | ○ | 5.200 | 38 | 124 | | 2 | x | 3.400 | 42 | 48 |
| 106▲ | 1 | ○ | 1.500 | 28 | 41 | 180 | 3 | x | 4.900 | 42 | 60 |
| | 2 | ○ | 2.000 | 28 | 60 | | 4 | ○ | 7.200 | 48 | 70 |
| | 3 | ○ | 3.000 | 30 | 55 | | 5 | ○ | 8.900 | 48 | 75 |
| | 4 | ○ | 4.300 | 30 | 70 | | 6 | ○ | 13.100 | 48 | 85 |
| | 5 | ○ | 5.100 | 32 | 75 | | 1 | x | 3.100 | 38 | 43 |
| | 6 | ○ | 6.000 | 32 | 124 | | 2 | x | 3.900 | 42 | 48 |
| 112▲ | 1 | ○ | 1.500 | 32 | 41 | | 3 | x | 5.300 | 48 | 60 |
| | 2 | ○ | 2.400 | 38 | 60 | | 4 | x | 7.400 | 48 | 70 |
| | 3 | ○ | 3.100 | 38 | 55 | | 5 | ○ | 9.100 | 55 | 75 |
| | 4 | ○ | 4.800 | 42 | 67 | | 6 | ○ | 10.800 | 60 | 85 |
| | 5 | ○ | 5.600 | 42 | 75 | | | | | | |
| | 6 | ○ | 6.200 | 42 | 85 | | | | | | |

| Datum diameter d_d (mm) | No. of grooves | Type | Weight (\approx kg) | Finished bore hole d_{max} (mm) | Hub length l (mm) | Datum diameter d_d (mm) | No. of grooves | Type | Weight (\approx kg) | Finished bore hole d_{max} (mm) | Hub length l (mm) |
|---------------------------|----------------|------|------------------------|-----------------------------------|---------------------|---------------------------|----------------|------|------------------------|-----------------------------------|---------------------|
| 190 | 1 | x | 3.200 | 42 | 43 | 355 | 1 | x | 7.000 | 48 | 49 |
| | 2 | x | 4.200 | 42 | 48 | | 2 | x | 9.700 | 55 | 55 |
| | 3 | x | 5.500 | 42 | 60 | | 3 | x | 13.400 | 55 | 67 |
| | 4 | x | 7.700 | 48 | 70 | | 4 | x | 18.300 | 60 | 80 |
| | 5 | ○ | 9.200 | 50 | 75 | | 5 | x | 18.800 | 65 | 75 |
| | 6 | ○ | 12.000 | 55 | 85 | | 6 | x | 19.800 | 75 | 90 |
| 200 | 1 | x | 3.400 | 38 | 43 | 400 | 1 | x | 8.500 | 50 | 49 |
| | 2 | x | 4.500 | 42 | 48 | | 2 | x | 10.000 | 55 | 55 |
| | 3 | x | 5.900 | 48 | 60 | | 3 | x | 14.300 | 60 | 67 |
| | 4 | x | 8.000 | 50 | 60 | | 4 | x | 18.500 | 65 | 80 |
| | 5 | ○ | 9.500 | 55 | 80 | | 5 | x | 22.500 | 70 | 85 |
| | 6 | ○ | 12.200 | 60 | 90 | | 6 | x | 28.000 | 75 | 90 |
| 212 | 1 | x | 3.800 | 42 | 43 | 450 | 1 | x | 9.900 | 50 | 55 |
| | 2 | x | 4.700 | 42 | 48 | | 2 | x | 10.900 | 55 | 55 |
| | 3 | x | 6.200 | 48 | 60 | | 3 | x | 15.100 | 60 | 67 |
| | 4 | x | 7.700 | 50 | 70 | | 4 | x | 20.500 | 65 | 80 |
| | 5 | x | 10.300 | 50 | 80 | | 5 | x | 26.000 | 70 | 80 |
| | 6 | ○ | 13.500 | 55 | 90 | | 6 | x | 28.900 | 75 | 90 |
| 225 | 1 | x | 4.000 | 42 | 43 | 500 | 1 | x | 10.700 | 50 | 55 |
| | 2 | x | 5.400 | 42 | 48 | | 2 | x | 13.700 | 60 | 59 |
| | 3 | x | 6.900 | 48 | 60 | | 3 | x | 15.200 | 65 | 67 |
| | 4 | x | 8.600 | 55 | 70 | | 4 | x | 21.300 | 70 | 80 |
| | 5 | ○ | 11.700 | 50 | 90 | | 5 | x | 30.000 | 75 | 80 |
| | 6 | ○ | 14.800 | 55 | 90 | | 6 | x | 33.800 | 80 | 90 |
| 250 | 1 | x | 4.200 | 42 | 43 | 560 | 2 | x | 15.000 | 60 | 55 |
| | 2 | x | 6.100 | 48 | 55 | | 3 | x | 24.200 | 65 | 67 |
| | 3 | x | 8.600 | 55 | 60 | | 4 | x | 26.000 | 70 | 80 |
| | 4 | x | 9.800 | 60 | 70 | | 5 | x | 34.400 | 75 | 80 |
| | 5 | x | 13.200 | 65 | 80 | | 6 | x | 39.000 | 80 | 90 |
| | 6 | x | 17.000 | 65 | 90 | | 2 | x | 20.200 | 60 | 80 |
| 280 | 1 | x | 5.700 | 48 | 49 | 630 | 3 | x | 27.000 | 65 | 80 |
| | 2 | x | 7.000 | 48 | 55 | | 4 | x | 30.800 | 75 | 86 |
| | 3 | x | 9.700 | 55 | 60 | | 5 | x | 37.200 | 80 | 90 |
| | 4 | x | 11.500 | 60 | 70 | | 6 | x | 44.000 | 90 | 100 |
| | 5 | x | 15.500 | 65 | 80 | | | | | | |
| | 6 | x | 18.000 | 65 | 90 | | | | | | |
| 300 | 1 | x | 5.900 | 48 | 49 | | | | | | |
| | 2 | x | 7.500 | 48 | 55 | | | | | | |
| | 3 | x | 10.500 | 55 | 67 | | | | | | |
| | 4 | x | 12.400 | 60 | 80 | | | | | | |
| | 5 | x | 16.500 | 65 | 80 | | | | | | |
| | 6 | x | 18.300 | 70 | 90 | | | | | | |
| 315 | 1 | x | 6.400 | 48 | 49 | | | | | | |
| | 2 | x | 8.200 | 55 | 55 | | | | | | |
| | 3 | x | 12.900 | 55 | 67 | | | | | | |
| | 4 | x | 13.000 | 60 | 80 | | | | | | |
| | 5 | x | 17.600 | 65 | 80 | | | | | | |
| | 6 | x | 20.600 | 75 | 90 | | | | | | |

| No. of grooves z | 1 | 2 | 3 | 4 | 5 | 6 |
|-----------------------|----|----|----|----|-----|-----|
| Face width b_2 (mm) | 25 | 44 | 63 | 86 | 105 | 124 |

● Solid pulley ○ Plate pulley (with or without holes) x Spoked pulley
 ▲ only for profile 17
 Hub position: one side flush
 Material: EN-GJL 200

We reserve the right to make technical changes.